

GES-5400

This extreme-volume 2-flavor soft serve freezer is perfect for serving lots of product in a short amount of time! Features the GES-5400 Genesis Series™ with the Virtual Quality Management System™ to streamline your business. Includes a front-loading refrigerated cabinet with a high speed pump. Our pressurized machines consistently produce smooth and creamy high and low fat products like ice cream, custard, yogurt and sorbets. Excellent for full-menu ice cream and custard stores, sports arenas & stadiums.



Multi-function LED Display
 with manager smart tools.

Virtual Quality Management System™
 monitors Temperature and Consistency to provide superior taste and quality.

Pump Forward Design

New pump forward design reduces maintenance and cleaning time.



Optional Sliding Tray Mix Storage

Mix tray slides out with mix containers in place which makes adding mix quicker and easier.




Self Closing Spigots
 prevents the mess and eliminates waste.

Optional Door Latch

Scroll Compressor Technology
 provides increased capacity, reliability and efficiency.

GES-5400 Soft Serve Freezer

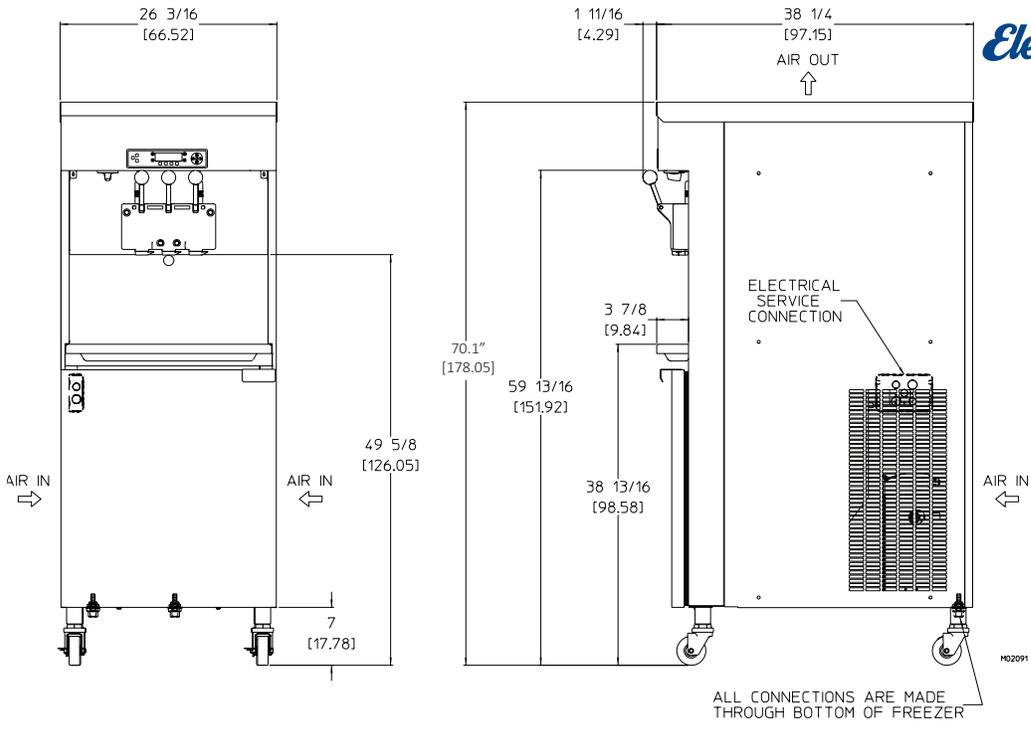

MODEL GES-5400 SPECIFICATIONS

Due to continual product improvements all specifications are subject to change without notice.

Weights	lbs.	kgs.	
Net	914	414	
Crated	995	460	
	cu.ft.	cu.m.	
Volume	58.42	1.65	
Dimensions	in.	cm	
Width	26-3/16	66.52	
Depth	38-1/4	97.15	
Height	70.1	178.05	
Electrical	Maximum Fuse Size	Minimum Ampacity (Qty)	NEMA Plug Type
208-230/60/1 Air	35 (2)	29 (2)	2P, 2W
208-230/60/1 Water	35 (2)	27.5 (2)	2P, 2W
208-230/60/3 Air	25 (2)	20 (2)	3P, 3W
208-230/60/3 Water	25 (2)	19 (2)	3P, 3W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

Bidding Spec

Electrical: Volt _____ Hz _____ Ph _____
 Cooling: _____ Neutral _____ Yes _____ No
 Options: _____

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

Beater Motor

Two, 2hp.

Refrigeration Systems

Two, 19,000 Btuh. R404a.
 Separate Cabinet Refrigeration, One, 1200 Btuh, R134a.
 Btuh may vary depending on compressor used.

Air Cooled

For proper air circulation, unit requires 6" (15.2 cm) air space at rear panel or 6" side clearance with 1" back and 29" top clearance.

Mix Capacity: 2 tanks - 24 quarts (22.7 liters) ea.

Freezing Cylinder Capacity: two - 5 quarts (4.7 liters) each



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13

Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois
 61244 USA

Phone : (800) 922 2629

E-mail: Sales@ElectroFreezeOfNewEngland.com

www.ElectroFreezeOfNewEngland.com